


The UP-DL103 LED recessed downlight adopts super slim and compact design, perfectly suitable for the narrow ceiling installation.

With an IP65 rating front cover design it is suitable for damp environment.

The traditional diamond plaited surface lens design ensures the high light transmittance and uniform lighting output.

T-shape heat sink greatly increases the radiation area and improves cooling efficiency.

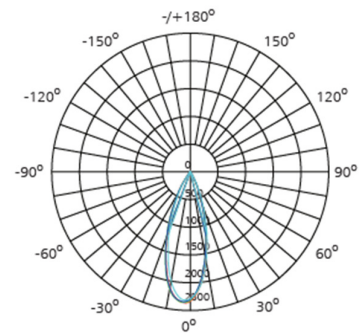

Key Information

Input Power	AC230V
Hole Cutout Size	75-80mm
Lumen Output	1000lm
Install	Recessed
Dimming Options	Triac Dimmable
IP Rating	IP65
Approvals	SAA, CE, RoHS

Photometric

Lm/W	100lm/W
CCT	2700K/3000K/4000K/5000K
CRI	≥90
Beam Angle	36°/60°

Construction

Dimensions	∅ 90x49.4mm
------------	-------------