

# Hotrun 90



Can be connected to single-phase or two-phase power supply


Dimensions	255 x 190 x 95 mm		
Power	9.0 Kw		
Voltage	2x240 Volts		
Current	40 or 2x20 Amps		
IP rating	IP24		
Connection	1/2 BSPP		
Weight	2.8 kg		
Performance at 37°C	inlet 12°C	5.1 l/m	outlet ≈37°C
Performance at 50°C	inlet 25°C	5.1 l/m	outlet ≈50°C
Response time	<10s		
Pressure range	100kPa min to 1000 kPa max		

\*Hotrun T43, T45 and T50 models are limited to the set temperatures.

Tip: Allow 50mm on sides for cord etc and 100mm top and bottom for water connections to allow the cover to be opened after installation

Tip: Base your model selection on the Winter inlet water temperature

Tip: Position within 6 metres of outlet if possible to minimise legionella risk

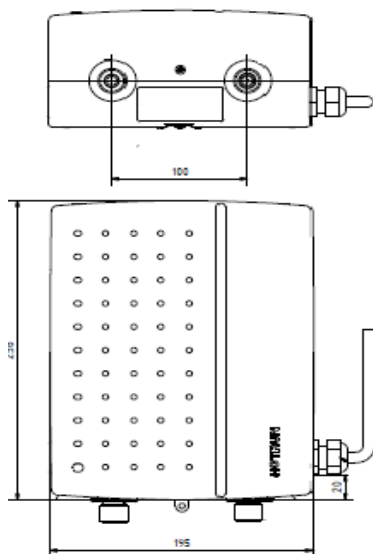

## Features

1. Compact
2. Mount at any angle
3. Creates minimal heat in vicinity
4. Minimal waste water
5. Only heats water that gets used
6. No over pressure valves or servicing
7. No tempering valves required for 50°C application (For other temperatures, please call us.)
8. Price competitive
9. Low cost installation
10. WaterMark certified # 40034